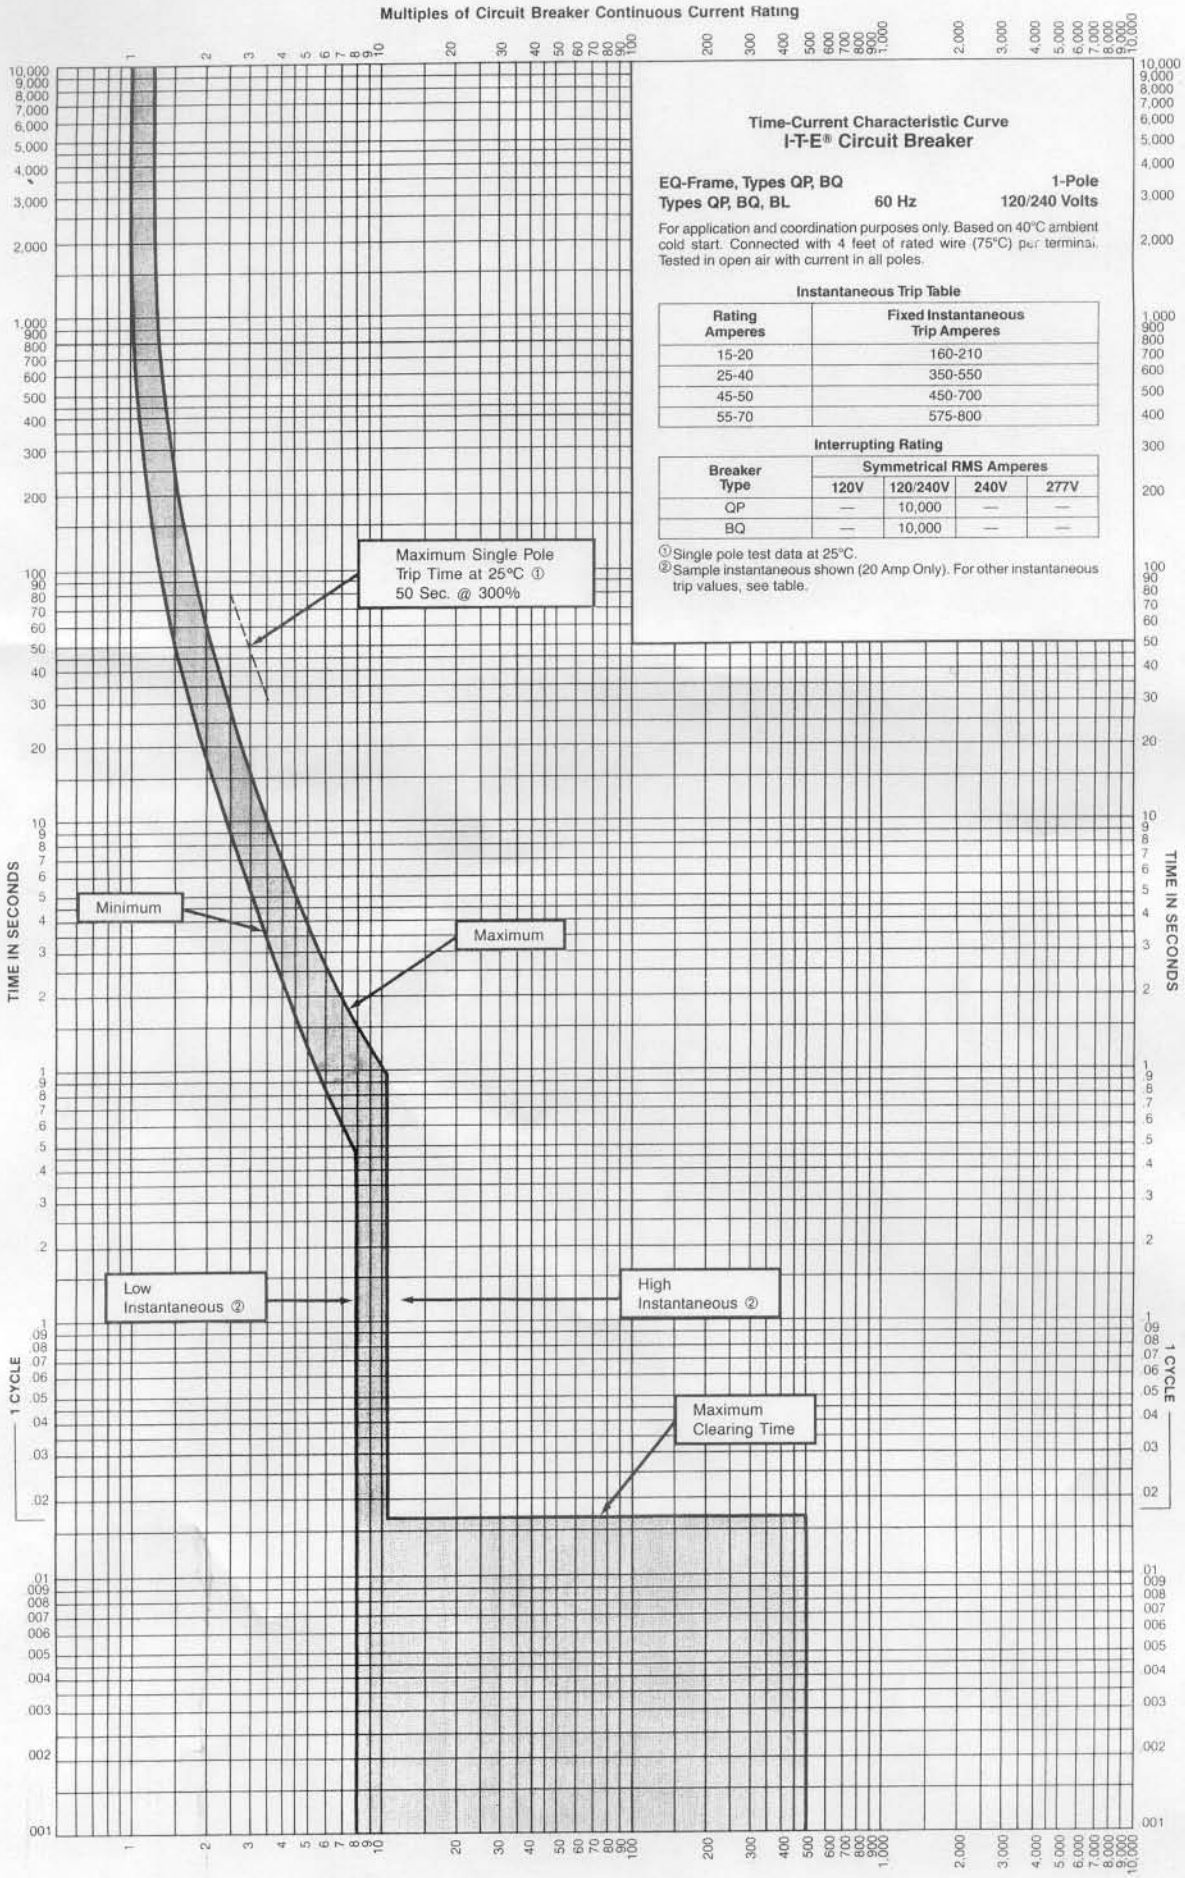

Time-Current Characteristic Curve
I-T-E® Circuit Breaker

EQ-Frame, Types QP, BQ — **1-Pole**
Types QP, BQ, BL — **60 Hz** — **120/240 Volts**

For application and coordination purposes only. Based on 40°C ambient cold start. Connected with 4 feet of rated wire (75°C) per terminal. Tested in open air with current in all poles.

Instantaneous Trip Table

Rating Amperes	Fixed Instantaneous Trip Amperes
15-20	160-210
25-40	350-550
45-50	450-700
55-70	575-800

Interrupting Rating

Breaker Type	Symmetrical RMS Amperes			
	120V	120/240V	240V	277V
QP	—	10,000	—	—
BQ	—	10,000	—	—

① Single pole test data at 25°C.
② Sample instantaneous shown (20 Amp Only). For other instantaneous trip values, see table.

I-T-E® Molded Case Circuit Breakers
Multiples of Circuit Breaker Continuous Current Rating

Siemens Energy & Automation, Inc.
Alpharetta, Georgia 30202